


Maintenance Tools

- Tools 286
- Assortments and refills 291



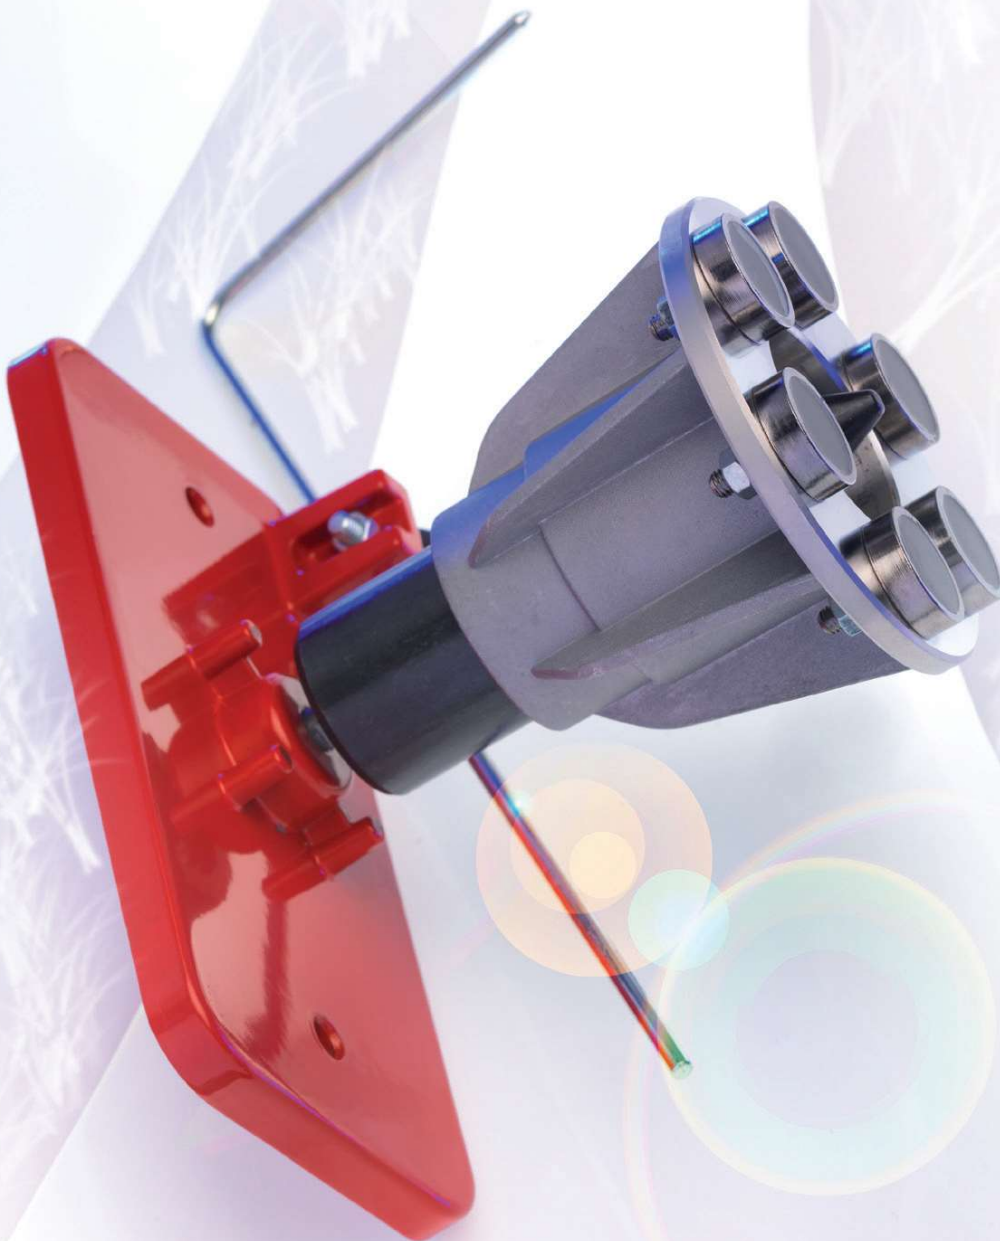

i OREGON
1 CLIPLIFT™
1 • Ideal for workshops, garden contractors and end-users • Stepless lifting over hydraulic system • Easy to use - light pressure on the pedal • Ideal for maintenance of cutting decks, blades, spindles, belts,... • Automatic locking system at 15°, 30° and 45° • High user safety via double blocking system. • Compact • Easy storage (wallmount) • Easy to transport (wheels) • CE approved • Machines up to 300kg (660 pounds) • Max deck width 122cm (48") • Folded size: 135cm x 48cm x 26 cm / 53.15" x 18.90" x 10.24" • Weight: 27kg / 60 pounds 42-086



Easy Maintenance of cutting decks



Easy lifting with light pressure on the pedal



Easy kneeling over hydraulic system



Double blocking system



Fastened wheel with provided belt



Easy to transport



All in place - pedal stored on the CLIPLIFT




Compact storage




i	OREGON
1 TYRE EMERGENCY REPAIR KIT • Usage for: - Tyre pressure check and inflation - Immediate repair of flat and puncture tyres • Kit contains: - 12 volt DC high capacity compressor - 3.5 meter length power cable - Digital pressure gauge. Can be pre-set to cut off when required pressure is reached - Powerful light with build-in hazard flashed and SOS signal transmitter - Highly efficient SOS Tyre Sealant - Adaptor for balls & air mattress	042-9643
2 LOADING RAMPS • Welded aluminium construction - Folding design - Arched form • 650kgs maximum load (Distributed) • Dimensions 2.25 m Long x 28.5 cm Wide - Weight 15kg • Tested design and manufacture for safety - Made in USA.	42-091



OREGON®		
TUNE-UP KIT		
1	• For Briggs & Stratton : Sprint & Classic < 2008 • Kit Includes: Air Filter 30-917, Spark Plug O-JR19, SAE30 Oil 600ml 010-9623, Fuel Additive 54-022, Spark Plug Wench	069-025
2	• For Briggs & Stratton : Sprint & Classic < 2008 • Kit Includes: Air Filter 30-919, Spark Plug O-SR19, SAE30 Oil 600ml 010-9623, Fuel Additive 54-022, Spark Plug Wench	069-030
3	• For Briggs & Stratton : Quantum • Kit Includes: Air Filter 30-710, Spark Plug O-JR19, SAE30 Oil 600ml 010-9623, Fuel Additive 54-022, Spark Plug Wench	069-026
4	• For Honda : GCV135 & 160 • Kit Includes: Air Filter 30-347, Spark Plug O-LR15YC, SAE30 Oil 600ml 010-9623, Fuel Additive 54-022, Spark Plug Wench	069-027
BLADE BALANCER		
5	• High-strength magnet for ideal blade positioning.	42-047
6	• A balanced blade reduces engine wear, stops vibrations, gives smoother cut. • Quality zinc die-cast.	42-100
BLADE SHARPENER		
7	• Ideal for sharpening rotary lawnmower blades, roto tillers, sickle bar cutters, hoes, and scythes.	55-001
COMPRESSION TESTER		
8	• 30,5cm (12") long, reads up to 300 p.s.i. • Flexible hose with side pressure release valve and 14mm (.5512") and 18mm (.7087") screw-in adaptors for spark plug holes.	42-422
GEAR PULLER		
9	• Takes diameters up to 15,2cm (5.98"). • Equipped with 1 pair 7,6cm (2.99") arms. • Screw 0,6mm (.023") x 20,3cm (8"). • Jaws drop-forged steel. • Crossbeam made of malleable iron.	42-601
HEMOSTAT		
10	• Hemostat 15,2cm (5.98"). • Curved. • Adjustable pressure locking teeth.	42-411

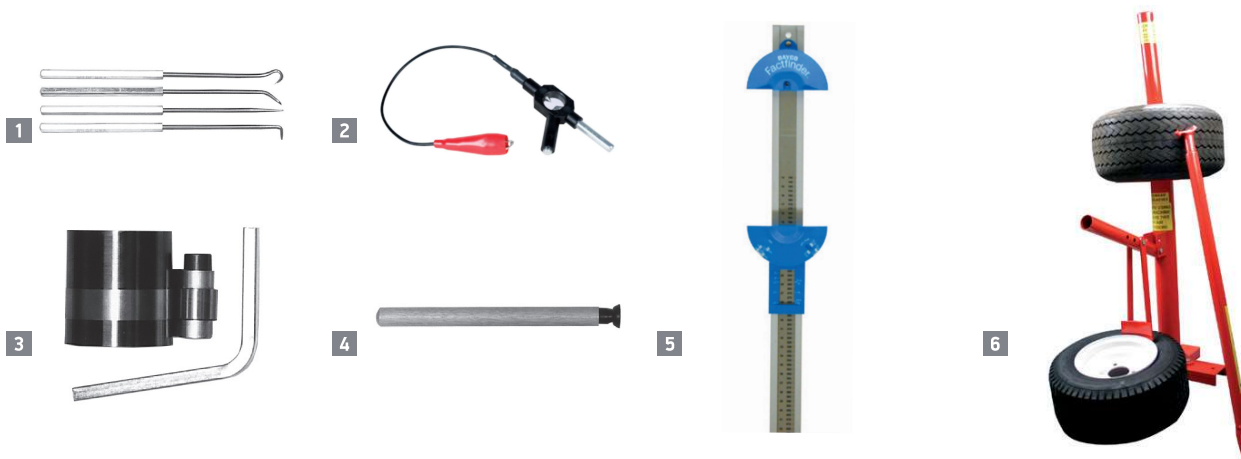

i		OREGON®
HOOK & PICK SET		
1	• 4 piece set. • For easy removal of seals, ropes, rings etc.	42-115-0
SPARK TESTER		
2	• Allows visual inspection of ignition output.	42-087
PISTON RING COMPRESSOR		
3	• Depth: 50,8mm (2"). • Capacity: 44,5mm (1-3/4") to 88,9mm (3-1/2"). • Adaptable to all types of rings. • Allen wrench included. • Briggs & Stratton # 19230.	42-217
VALVE GRINDER		
4	• Vacuum cup attached directly to handle. • For seating valves to seats.	42-311
BELT MEASURER		
5	• Measures belts from 14" - 100" (35,6cm - 254cm) in length. • Heavy duty aluminum. • Measurement in inches.	75-910
TYRE CHANGER		
6	• Complete. • Designed especially for 4" to 12". • Lug-center or bearing-in hub wheels.	67-214

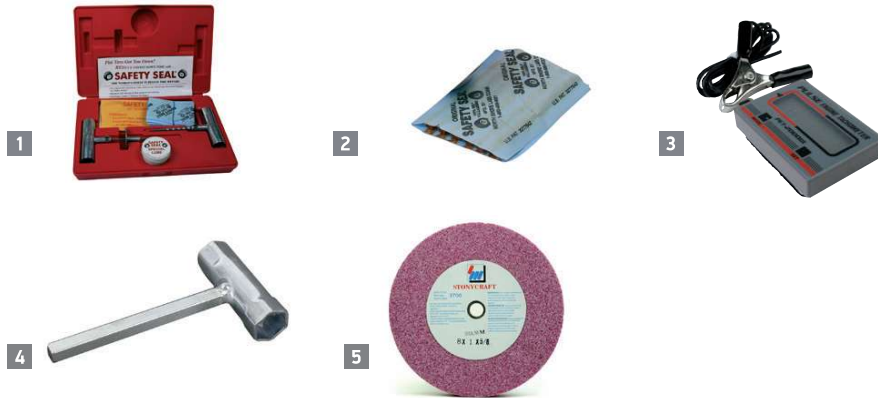

i OREGON®	
TYRE REPAIR KIT	
1	• Tyre repair kit for workshop. 70-700
2	• Tyre repair kit - refills 70-703
COMPACT DIGITAL TACHOMETER	
3	• 2 or 4 stroke engine speed measurement up to 30,000 RpM. 42-351
SPARK PLUG TOOLS	
4	• 19 & 21mm Plug Wrench with 3/8" (9.5mm) Square Oil-Plug Wrench. 57-012
GRINDER TOOL	
5	• Grinding Stone. Recommended replacement for 88-024. 46 Grit, 200mm (8") x 25mm (1") x 16mm (5/8") 88-047



i OREGON	
E-CLIP	
1	Total pieces : 300 08-300
COTTER PIN	
2	Total pieces : 260 08-410
ELECTRICAL TERMINAL & CONNECTOR	
3	Total pieces : 170 08-152
HAIR PIN	
4	Total pieces : 150 08-150
GREASE FITTING - IMPERIAL	
5	Total pieces : 110 08-016
SOCKET SET SCREW	
6	Total pieces : 200 08-200
SPRING PIN	
7	Total pieces : 285 08-375



i OREGON	
TILLER TINE PIN	
1	Total pieces : 63 - Std. refill : 10 08-710
TORSION & EXTENSION SPRING	
2	Total pieces : 62 08-201
SNAP RING	
3	Total pieces : 300 08-331
O- RING	
4	Total pieces : 210 08-225

Batteries

- Dry lead acid batteries 294
- Sealed lead acid batteries 297




DRY LEAD ACID BATTERIES



Check overall dimensions
of your battery including terminals


														
			VOLT	AH	SIZE (MM)			L	R	VOLUME ACID	WITH ACID	APPLICATION GUIDE		
DRY LEAD ACID BATTERIES														
1	12N24-3	dry	12	24	184	124	174	⊖	⊕	1,80	7,90	2 3	AYP, Castelgarden, John Deere, Dixon, Gutbrod, Husqvarna, MTD, Snapper, Stiga, Toro, Snowscooters (Aktiv, Lynx, Ockelbo)	104950
2	12-N24-3	dry, with acid pack	12	24	184	124	174	⊖	⊕	1,80	5,00	2 3	AYP, Castelgarden, Dixon, Gutbrod, Husqvarna, John Deere, MTD, Snapper, Stiga, Toro	104950A
3	12N24-4	dry	12	24	184	124	174	⊕	⊖	1,80	7,90	2 3	Lawnflite, John Deere, MTD, Simplicity	104951
4	12-N24-4	dry, with acid pack	12	24	184	124	174	⊕	⊖	1,80	5,00	2 3	Lawnflite, John Deere, MTD, Simplicity	104951A





Check overall dimensions
of your battery including terminals


														
			VOLT	AH	SIZE (MM)			L	R	VOLUME ACID	WITH ACID	APPLICATION GUIDE		
DRY LEAD ACID BATTERIES														
1	12N18-3	dry	12	18	206	91	164	⊖	⊕	1,20	6,20	2 3 5 6	Various garden tractors (Etesia, MTD, Stiga, Park, Villa...), Quads and Snowscooters (Ski Doo, Polaris, Kawasaki, Ockeldo, Trapper, Yamaha)	106529
2	12N14-3A	dry	12	14	135	90	167	⊖	⊕	0,80	4,90	2 3	Lawnflite, Mountfield, MTD, Murray, Noma, Wheel Horse	104953
3	U1-R9	dry	12	24	196	131	184	⊖	⊕	1,92	8,07	2 3 6	Ariens, AYP, John Deere, Dixon, Gutbrod, Husqvarna, Jacobsen, Kubota, Lawn Boy, MTD, Murray, Scag, Snapper, Stiga, Toro, Wheel Horse, White, Snowscooters (Aktiv, Lynx, Ockelbo)	10-4947
4	U1-9	dry	12	24	196	131	184	⊕	⊖	1,92	8,07	2 3	Ariens, John Deere, Jacobsen, Kubota, Lawn Boy, Lawnflite, MTD, Murray, Scag, Simplicity, Snapper, Toro, Turfmaster, Yardman, Wheel Horse, White	10-4948
5	U1-R7	dry	12	18	196	131	184	⊖	⊕	2,04	7,38	2 3	Garden tractors (Dixon, Massey Fergusson, Polaren...)	10-4972
6	U1-7	dry	12	18	196	131	184	⊕	⊖	2,04	7,38	2 3	Garden tractors (Ariens, Bolens, Dixon, Homelite, Murray, Noma, Polaren, Toro, Wheel Horse...)	10-4971
7	YB9B	dry	12	9	137	76	140	⊕	⊖	0,60	3,10	2	Small Ride-on's (Bolens, Jacobsen...) and motorbikes (Piaggio)	10-4967
8	12N12A-4A-1	dry	12	12	135	81	161	⊕	⊖	0,72	4,20	2	Ariens and other small Ride-on's	104952






Check overall dimensions
of your battery including terminals


														
			VOLT	AH	SIZE (MM)			L	R	VOLUME ACID	WITH ACID	APPLICATION GUIDE		
DRY LEAD ACID BATTERIES														
1	YB14L-A2	dry	12	14	135	91	167	⊖	⊕	0,90	4,50	2 3 5 6	Various garden tractors, Quads and Snowscooters (Artic Cat, Artco, Yamaha)	106526
2	YB14A-2	dry	12	14	135	91	167	⊕	⊖	0,90	4,50	2 3 5 6	Various garden tractors, Quads and Snowscooters (Kawasaki, Polaris, Suzuki, Yamaha, Honda)	106528
3	Y50-N18L-A2	dry	12	20	206	91	164	⊖	⊕	1,50	7,50	2 3 6	Allen, MTD, Allen, White, Snowscooters (Artic Cat, Kawasaki, Ockelbo, Polaris, Ski-Doo)	104954
4	Y60-N30L-A	dry	12	30	196	131	184	⊖	⊕	1,70	8,60	3	Various garden tractors	10-4957
5	Y60-N30-A	dry	12	30	196	131	184	⊕	⊖	1,70	8,60	3	Various garden tractors	10-4958
6	YT4L-BS	dry, with acid pack	12	3	114	71	86	⊖	⊕	0,19	1,50	1	Various walk-behind mowers	104960
7	YTX14-BS	dry, with acid pack	12	12	152	88	147	⊕	⊖	0,69	4,50	2 3	Honda	104956




SEALED LEAD ACID BATTERIES




													OREGON
		VOLT	AH	SIZE (MM)			L	R	VOLUME ACID	WITH ACID	APPLICATION GUIDE		
SEALED LEAD ACID													
1	SLA 12-18	12	18	180	75	165	⊖	⊕	-	6,10	2 3	Alko, Castelgarden, Honda, Husqvarna, John Deere, Simplicity, Stiga	106447
2	U1-R9	12	24	196	130	180	⊖	⊕	-	8,33	2	Husqvarna ride-on	10-4961
3	U1-9	12	24	196	130	180	⊖	⊕	-	8,33	2		10-4962
4	SLA U1-34	12	34	196	130	180	⊕	⊖	-	9,37	2 3	Original equipment on Countax and Echo-Trak	108519
5	-	12	2,5	113	89	70	*		-	1,10	1	Various pedestrian mowers with electric start, with standard mower plug and lead	33-500-0





Check overall dimensions
of your battery including terminals

													
		VOLT	AH	SIZE (MM)			L	R	VOLUME ACID	WITH ACID	APPLICATION GUIDE		
SEALED LEAD ACID													
1	SLA 12-5.4E	12	5	90	70	101	⊕	⊖	-	1,62	1 2	Walk-behind e/start mowers, Flymo CT250 grass trimers, Replace Gates eggbox battery	108460
2	SLA 12-7E	12	7	151	65	95	⊕	⊖	-	2,39	2	Small riders from McCulloch and Wolf, also fits sprayers	108459
3	SLA 12-12E	12	12	152	99	102	⊕	⊖	-	3,56	1	Replacement for rechargeable walk-behind mowers	108456
4	SLA 12-20E	12	20	181	77	167	⊖	⊕	-	5,90	1 2	Alko, Castelgarden, Honda, John Deere, Simplicity, larger rechargeable walk-behind mowers, sprayers and golf trolleys	108457
5	SLA 12-22	12	22	180	75	165	⊖	⊕	-	6,10	2 3	High capacity version of 106447 for adverse conditions	108458



Tyres

• Wheels	310
• Anti-scalp wheels	311
• Tyres	313
• Tyre sealant	316
• Accessories and tools	317



WHEELS - DECK WHEELS - TYRES



DIAMOND



RIB



TURF



GEAR



LUGGED RIB

											OREGON
	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	TREAD PATTERN		
UNIVERSAL WHEELS PLASTIC											
	150	6"	12.7	1/2"	38	1-1/2"	35	1-3/8"	Diamond	72-106	
	175	7"	12.7	1/2"	38	1-1/2"	35	1-3/8"	Diamond	72-107	
	200	8"	12.7	1/2"	45	1-3/4"	35	1-3/8"	Diamond	72-108	
	150	6"	-	-	45	1-3/4"	38	1-1/2"	Turf	72-600	
	175	7"	-	-	45	1-3/4"	38	1-1/2"	Turf	72-601	
	200	8"	-	-	52	2"	48	1-7/8"	Turf	72-602	
UNIVERSAL WHEELS METAL C/W BALL BEARINGS											
	175	7"	12.7	1/2"	38	1-1/2"	35	1-3/8"	Diamond	72-430	
	200	8"	12.7	1/2"	45	1-3/4"	35	1-3/8"	Diamond	72-437	

												OREGON
	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	TREAD PATTERN	MATERIAL		
OEM REPLACEMENT WHEELS												
AMF/Noma # 54446	200	8"	12.7	1/2"	45	1.3/4"	35	1.3/8"	Diamond	Plastic	72-108	
AYP # 700953	200	8"	12.7	1/2"	50	2"	41	1.5/8"	Gear	Plastic	72-458	
CastelGarden #81007326/0 Stiga # 1111-2656-01	175	7"	12.2	7/16"	43	1.5/8"	38	1.1/2"	Turf	Plastic	72-605	
CastelGarden # 81007313/0 Stiga # 1111-2665-01	200	8"	12.2	7/16"	51	2"	38	1.1/2"	Turf	Plastic	72-606	
Honda # 42710-VA9-K80	175	7"	12.7	1/2"	43	1.5/8"	38	1.1/2"	Turf	Plastic	72-603	
Honda # 44710-VA9-B60	200	8"	12.7	1/2"	51	2"	38	1.1/2"	Turf	Plastic	72-604	
Honda # 42700-VK6-020ZA	250	9"	14.3	9/16"	57	2.1/4"	50	1.15/16"	Turf	Plastic	72-169	
Honda # 42710-VE2-M01ZE, # 42710-VG3-B00	200	8"	12.7	1/2"	51	2"	45	1.3/4"	Wave	Plastic	72-170	
Honda # 44710-VL0-L01ZB	200	8"	12.7	1/2"	51	2"	45	1.3/4"	Wave	Plastic	72-172	
Murray # 71133	200	8"	12.7	1/2"	51	2"	35	1.3/8"	Turf	Plastic	72-113	
Murray # 71132	200	8"	12.7	1/2"	51	2"	35	1.3/8"	Turf	Plastic	72-114	

NEW

1



NEW

2



3



4



5



NEW

6



7




8



			
ANTI-SCALP WHEELS (DECKMOWERS)			
1	AYP # 188606	- Deck wheel - Size: 5" x 1-7/8". - Bearing ID: 1/2". - Hub: Offset plastic. - Hub Length: 1-5/8".	72-162 NEW
2	Bobcat # 2721512	- Deck wheel - Size: 5" x 2-3/4". - Bearing ID: 5/8". - Hub: Centered / plastic. - Hub Length: 3-1/4".	72-161 NEW
3	Castelgarden # 82700000/0	- Deck roller wheel - TC102 + 122 older models	72-092
4	Castelgarden # 82700002/0	- Deck roller wheel - TC102 + 122 models -> 2002	72-093
5	Murray # 92683	- Bearing ID: 1/2". - Hub: Offset plastic. - Hub Length: 2-1/2". - Tread: Smooth. - Size: 5" x 2-1/2".	72-094
6	John Deere # AM133602, # M111489, # AM116299	- Deck wheel kit - Size: 5" x 2-1/2", 5/8".	72-165 NEW
7	Kubota # 76505-46250	65,1mm OD x 12mm ID x 102mm W. 2-1/2" OD x .475" ID x 4" W	72-322
8	MTD # 734-3058	- O.D.: 127mm (5"). - Width: 66,6mm (2-5/8"). - Hub Length: 60,3mm (2-3/8"). - Tread: Oval.	72-308-1



		i	OREGON
ANTI-SCALP WHEELS (DECKMOWERS) ./..			
1	Murray # 92683	• Wheel size: 127mm (5") x 63,5mm (2-1/2"). • Bearing ID: 12,7mm (1/2"). • Hub: Offset plastic. • Hub Length: 38,1mm (1-1/2"). • Tread: Smooth.	72-094
2	Noma # 302611 Husqvarna # 5165512-02 Husqvarna # 5333026-11	• O.D.: 152mm (6"). • I.D.: 12,7mm (1/2"). • Width: 34,9mm (1-3/8"). • Hub Length: 34,9mm (1-3/8").	72-100
WHEEL ASSEMBLIES			
3	Scag # 48307-01	• 9 x 350 slick thread. • 101.6mm (4") centered hub - orange. • 3 piece w/15.8mm (5/8") roller bearing.	72-795
TYRE WRAP			
4	Honda # 42861-VB5-800	• Use on Honda walk-behind mowers. • OD: 216mm (8"). • Width: 57mm (2.24").	70-950

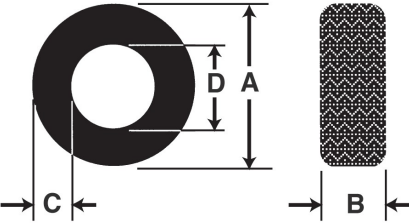

16 X 650 - 8 = A X B - D

410/350 - 4 = B/C - D

- This would be 11" high (3.5 + 3.5 + 4), 4.1" wide and 4" rim
- In metric measure, this would be 279 mm high (C+D+C), 104 mm in width (B) with an inside diameter of 102 mm (D).

				OREGON
TYRE SIZE	TREAD PATTERN	PLY RATING	BRAND	
OREGON® TYRES (ALL TYRES ARE TUBELESS)				
480/400 - 8	Wheelbarrow Rib	2 PR	OREGON®	58-012R
480/400 - 8	Wheelbarrow Rib	4 PR	OREGON®	58-013R
410/350 - 4	Stud	2 PR	OREGON®	58-020R
480/400 - 8	Stud	2 PR	OREGON®	58-024R
NEW 410/350 - 4	Universal High Speed	4PR	OREGON®	58-041R
NEW 11x400 - 4	Turf Rider	2 PR	OREGON®	58-061R
13x500 - 6	Turf Rider	2 PR	OREGON®	58-064R
13x650 - 6	Turf Rider	4 PR	OREGON®	58-067R
15x600 - 6	Turf Rider	2 PR	OREGON®	58-068R
NEW 4.80 - 8	Universal High Speed	Load range LRB	OREGON®	58-150R
16x650 - 8	Turf Rider	2 PR	OREGON®	58-071R
16x650 - 8	Turf Rider	4 PR	OREGON®	58-072R
16x750 - 8	Super Turf	4 PR	Kenda	68-204
18x850 - 8	Turf Rider	2 PR	OREGON®	58-074R
18x850 - 8	Turf Rider	4 PR	OREGON®	58-075R
18x950 - 8	Turf Rider	2 PR	OREGON®	58-076R
18x950 - 8	Turf Rider	4 PR	OREGON®	58-077R
20x800 - 8	Turf Rider	2 PR	OREGON®	58-078R
20x800 - 8	Turf Rider	4 PR	OREGON®	58-087R
20x1000 - 8	Turf Rider	2 PR	OREGON®	58-079R




WHEELBARROW RIB




STUD



TURF RIDER



SUPER TURF




UNIVERSAL HIGH SPEED

		OREGON
APPLICATION	LINKS	
LAWN AND GARDEN TYRE CHAINS		
13-500-6, Deep Lug - Snow Hawg	2	67-007
16x650-8, 15x600-6	2	67-001
18x850-8	2	67-005
18x950-8	2	67-018
20x800-10, 20x800-8	2	67-017
20x1000-10, 20x1000-8	2	67-002
23x950-12, 23x1050-12	4	67-011



2 LINK SPACING


 4 LINK SPACING TYRE CHAINS
(tyre and wheel not included)

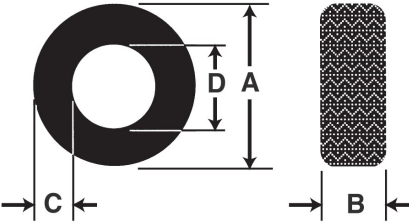

16 X 650 - 8 = A X B - D

410/350 - 4 = B/C - D

- This would be 11" high (3.5 + 3.5 + 4), 4.1" wide and 4" rim
- In metric measure, this would be 279 mm high (C+D+C), 104 mm in width (B) with an inside diameter of 102 mm (D).

				OREGON
	TYRE SIZE	VALVE	TREAD PATTERN	
UNIVERSAL WHEELS PLASTIC				
	9 x 350 - 4		Smooth	70-701
INNERTUBES 4"				
	280/250-4	Bent Valve		71-109
	410/350-4	Bent Valve		71-400
	410/350-4	Bent Valve Parallel		71-275
	410/350-4	Straight Valve		71-276
INNERTUBES 5"				
	11x400-5	Bent Valve		71-511
	11x400-5	Straight Valve		71-403
INNERTUBES 6"				
	410/350-6	Straight Valve		71-610
	410/350-6	Bent Valve		71-600
	13x500-6	Straight Valve		71-096
	13x500-6	Bent Valve		71-101
	13x650-6	Straight Valve		71-250
	13x650-6	Bent Valve		71-280
	15x600-6	Straight Valve		71-102
	15x600-6	Bent Valve		71-405
INNERTUBES 8"				
	400-8	Straight Valve		71-103
	480/400-8**	Straight Valve		71-800
	16x650-8	Straight Valve		71-816
	18x650-8	Straight Valve		71-406
	18x850-8 / 18x950-8*	Straight Valve		71-104
	20x1000-8	Straight Valve		71-407
	20x800-8	Straight valve		71-004

* Fits Noma riders

** Replacement for Snapper riders (Use 71-400 on front and 71-80 on back)

16 X 650 - 8 = A X B - D

410/350 - 4 = B/C - D

- This would be 11" high (3.5 + 3.5 + 4), 4.1" wide and 4" rim
- In metric measure, this would be 279 mm high (C+D+C), 104 mm in width (B) with an inside diameter of 102 mm (D).

				OREGON
	TYRE SIZE	VALVE	TREAD PATTERN	
INNERTUBES 10"				
	20x800-10	Straight Valve		71-100
INNERTUBES 12"				
	23x850 /950-12	Straight Valve		71-105
	23x1050-12	Straight Valve		71-408

	i	OREGON
VALVE STEMS		
	• Short	71-001
	• Long	71-002

TYRE SEALANT




TYRE SEALANT

- Protects against punctures made by objects up to 12mm diameter.
- Will remain fluid and seal punctures down to -20°C.
- Removable with water.
- Nontoxic and environmentally friendly.
- Does not alter properties of rubber nor metal.
- Can be used in vehicle up to 80km/h.
- Acts as a puncture repair in emergency.
- Extends the useful life of the tyre.



Ref		x/Box	x/Pallet
010-9640	1L Bottle	12	600
010-9641	25L Canister	1	32

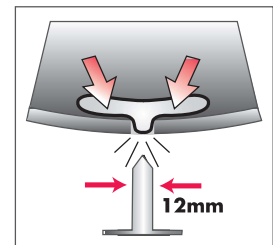


11C HIGH PERFORMANCE TYRE SEALANT

Increase tread service life. Lower maintenance and down-time costs.

- Prevents against punctures made by objects up to 16mm diameter.
- Will remain fluid and effectively seal punctures in a tyre down to -23°C.
- Removable with water.
- Nontoxic and environmentally friendly.
- Does not alter properties of rubber nor metal.
- Can be used in vehicle up to 80km/h.



Ref		x/Box	x/Pallet
010-9637	1 liter Tyre Sealant	12	
010-9638	25 Liter Tyre Sealant	1	
010-9639	Pump	1	

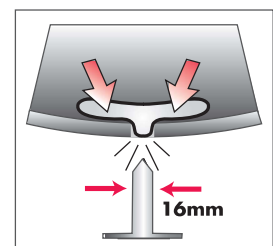

TYRE TOOLS AND ACCESSORIES



TYRE CHANGER

- Complete.
- Designed especially for 4" to 12".
- Lug-center or bearing-in hub wheels.

Ref	x/Box	x/Pallet
67-214	1L Bottle	



SLIPTAC TYRE BEAD LUBRICANT

- One gallon bottle, dries fast, leaves no residue.
- Prevents rim slippage, prevents rust, a liquid bead lubricant for easier mounting of lawn and garden, car and truck tyres.
- Non-combustible, non toxic.

Ref	x/Box	x/Pallet
67-113	1L Bottle	



TYRE REPAIR KIT FOR WORKSHOP

Ref	x/Box	x/Pallet
70-700	Tyre repair kit for workshop	



TYRE REPAIR KIT - REFILLS

Ref	x/Box	x/Pallet
70-703	Tyre repair kit - refills	

